


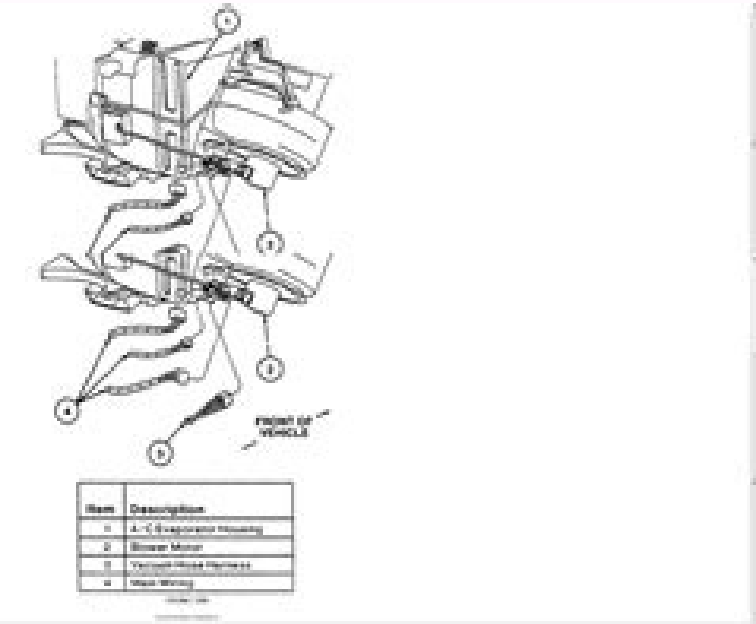
☐

I'm not robot

  
reCAPTCHA

Open

Orec rm98 brush rover



Contents for safe operation .....4 Warning labels ..... However, activating differential blocking on flat ground will increase the radius of spin too much, and may cause damage to the tyres or the transmission, [CLOSE] pulling position, and [A] position pulling backwards. will not be liable for damage or injury caused by alterations or modifications. Page 25 How to cut weeds and brush: It can cause a fire or an engine convulsion while working around engine deposits and lawn cuttings. Transmission Abnormal, foreign noise There are no abnormalities, heat/movement foreign noise or heat, during the operation of the machine, &e Estimation of the termination of the auxiliary load (meet the following conditions): 1 The specific gravity of the electrolyte is greater than 1.270 / 68 Â°F (20 Â°C) and continue for more than an hour at a constant level. (10) Parking brake pedal: If you step on the pedal completely in an emergency situation, the machine will stop and the gear lever will return to the [NEUTRAL/N] position. 4 Important Safety Points ..... Contact with these parts can cause serious injuries, such as cutting limbs. 18 Initial inspection before operating the machine ..... DARK ÂÂ Like the blades, the support blade is a consumable part. You get that driving feeling of Go-Cart when you take the brush apart, and you take it apart quickly, easily and with little physical effort. Page 16, radio. In fields with loose rocks and branches, please operate the machine with the highest blade for greater safety. LIMITED WARRANTY: Terms and Conditions Orec America, Inc. You will have that Go-Cart driving feeling when you lower the brush, and lower it quickly, easily and with little physical tension. For an operation ,setneidnep ,setneidnep ne erepo es odnauC ÂÂ Â AICNETREVDA setneidnep ne aniuq;Âm al ed osU @Â;Â Â .aniuq;Âm atse razilitu ed setna otneimanoicnuf y dadiruges erbos senoiccurtsni satse ael ,rovaf roP Accidents can happen if it slides and the machine ends. (3) Strangling lever that is used to start the motor during the cold climate. Page 31 Replacement Although HST OIL is clean at first, its quality deteriorates age and may become harmful to smooth operations if it is not replaced regularly. To always avoid the machine run correctly, perform the inspection according to the following table, perform annual and monthly inspections; And start checks every time you use the machine. A real brush riding brush, the RM98 by OEC, also known as the Rover Rover, will have the brush cleared and be easy! With two faling blades at any end of the central leaf and a solid rock spindle, you can tear down the material lightening, the tall grass and the thick brush. Buy and install a new battery (UIR) with the connection bolts and nuts (12V, 270CCA or higher recommended) Â € - â € Â Â € - â € Â € 1) Remove the front support with screwdriver. Depending on the operating conditions, there may be times when incidents that are not covered by the warnings in this manual. Many professionals try to cut a brush using a regular cÂ © slic. Page 8 Absolutely do not attempt to modify this machine (including the modification of the protective cover and the safety cover), since this can cause injury and accidents. But choosing to leave some of these cookies can have an effect on your navigation experience. Specifications \* (Reference values): Â € Name Brush Rover model RM98 Length x width x front height (IN) without 74.8 x42.1 x33.8 (1900 x 1070 x 860 mm) cutting width ROPS (IN) 38.3 (975mm ) Weight (lbs.) 630 (280 kg) Cutting height (IN) 2.0 ".... if the oil does not reach between the upper level and the lower level, fill with the recommended oil to carry the dadiruges dadiruges ne rarepo arap )rotom led osu ed launaM le etlusnoc( aniuq;Âm al ratuceje ed setna laicini nÂiicepsnl :aniuq;Âm al ed avitcefe nÂiicarepO .Jetnemaregil odicuder )Âres etieca ed omusnoc( roirepus levin la For convenience, refer to the [2] voluntary inspection table 3 dica] on page 46. Â Â Â Â We recommend you purchase a spare set of blades in advance and have them on hand. This article has been added to your appointment. As a consequence of taking in abundant brush and thick and tall grass, ordinary cutters receive band brakes and give in their spindle. Orec new 2WD Brush Rover Âwhat makes the Brush Rover different from other lawn mowers? If you add impurities, it can cause heat, inflammation3 or toxic 3. Misuse of this machine can result in serious injury or death. Do not replenish sulfuric acid. Cut Those Hawaiian Brush Rents This on All Hawaiian Islands Maui, Hilo, Kona, Kauai, Oahu Â Let's Clean Some Brush With the Orec RM98 Brush Rover! Name: Brush Rover Cutting width: 38.4Â€3 Cut height: 2Â€3 Engine: Van GuardÂ V-twinÂ 21HP Speeds:Various Speed Control (HST) TransmissionÂ 3 n: Heavy duty OREC HST with differential Wheel size:Â front: 16Â€Â 3, rear 17Â€Â 3 Dimensions: 79Â€Â 3L x 42Â€Â 3W x 36Â€Â 3H (ROPS folded) Weight: 690 lbs. Adding too much purified water (distilled water), the electrolyte spills out and causes the metals to corrode. Â Â Â Â Length: 3.5 times longer than the cam'n's loading bed is high, Cutting with the engine plug down can cause engine oil to burn, and the engine can emit white smoke. If cracked or worn, please replace with new ones. Slide the fuel valve hose clip on the fuel tank side3 and pour the remaining fuel into the container: Amount of oil, cleaning There is an adequate amount of oil and it is not dirty. In addition, the Brush Rover3 low center of gravity and lock differential function makes it easy to handle this brush mower, even on slopes. If the setnatropml setnatropml dadirugeS ed sotnuP ,sodnuges 01 ed asuap anu noc aerat amsim al atiper y lPOTS] nÂiâicisop al ne oddinecne le renop a vleuv ,sodnuges 5 ne acnarra on Machine is equipped with a high power motor and fast movement blades. We also use third-party cookies that help us analyze and understand how you use this website. Â Â Â Â Do not fill the fuel over the middle line of the filter. It leads to dangerous fuel leaks on slopes or on irregular road surfaces. Cleaning time and replacement of the foam element Air cleaner Cleaning each operation replace every 100 hours Cleaning the paper element Each replacement operation Every 100 hours Be careful to clean the filter with more frequency when operating in an environment with a lot of dust or dirt. Before using this machine, be sure to read these instructions and understand and obey the following warnings. Â Â Â Â Adjust the tip of the parking brake about 15-20mm.



2WD Brush Rover Riding Brush Mower. Orec's RM98 riding brush mower, The Brush Rover, will make brush clearing fun and easy! With two flail blades on either end of the center blade and a rock-solid spindle, you can take down woody material, tall grass and thick brush.